


IPG-8901609-8901615

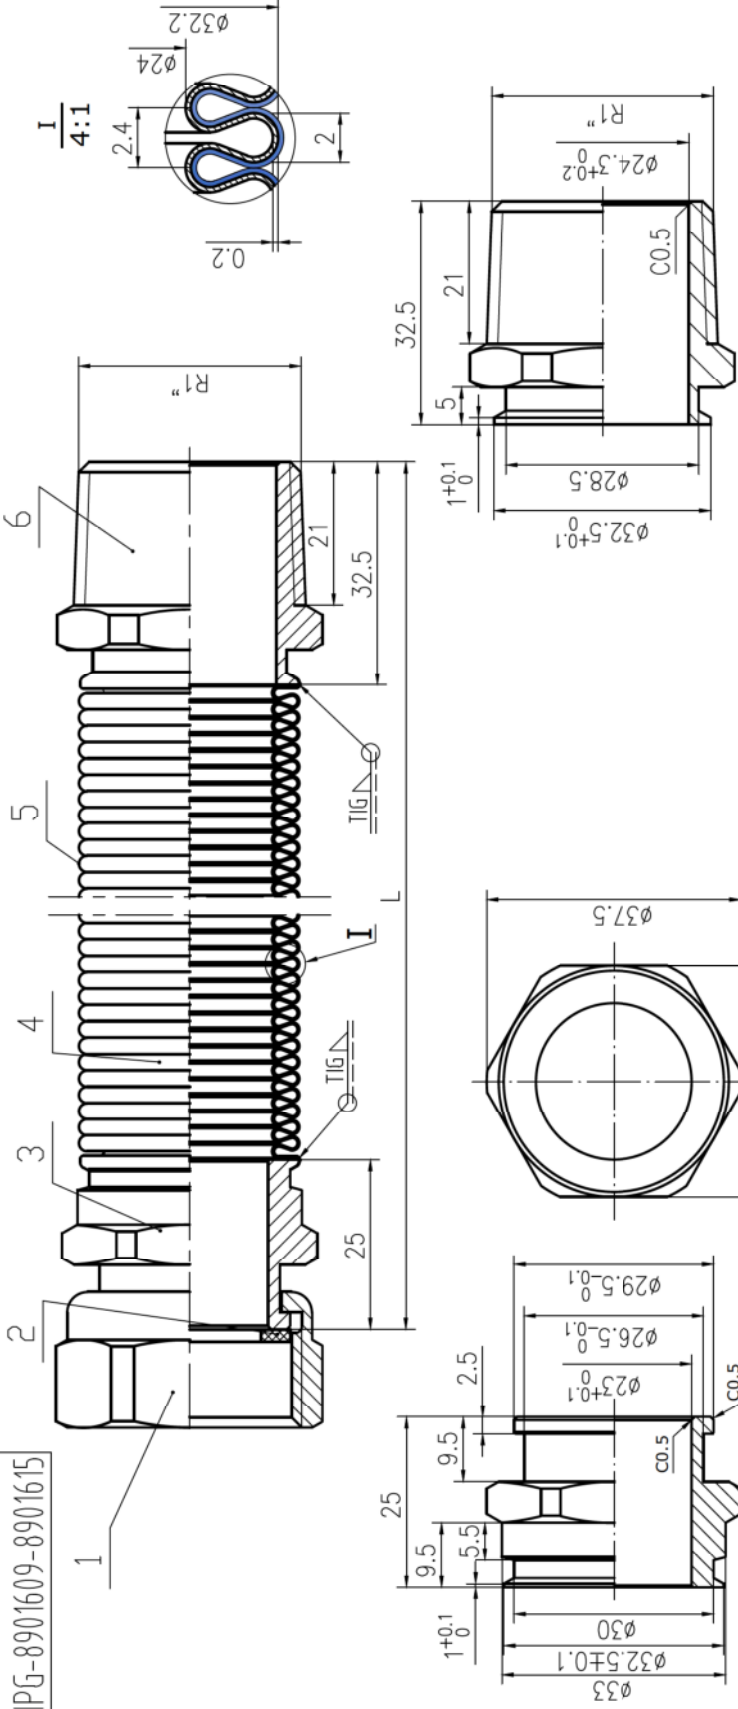

Technical requirement :

1. Annealing and compression after hose body with cover
2. weld joint to be uniform
3. No scratches or other defects on the surface of the hose
4. Wave uniformity
5. Working pressure 3Bar
6. Working temperature: Max 110°C

| 6 | TZX-201-25-1 | Male | 1 | ASTM304 | | | | | | | | |
|-----|---------------|------------------|------|----------|---------|--|--|--|--|--|--|-------------|
| 5 | TZX-404-14-35 | heat shrink tube | 1 | PE | | | | | | | | |
| 4 | TZX-001-320-1 | Metal hose | 1 | ASTM316L | | | | | | | | φ32x0.2 |
| 3 | TZX-308-25-1 | Joint | 1 | ASTM304 | | | | | | | | |
| 2 | TZX-401-25-1 | Gaskets | 1 | NBR | | | | | | | | φ30.5xφ21x3 |
| 1 | TZX-101-25-1 | Nut | 1 | ASTM304 | | | | | | | | |
| No. | Code | Name | QTY. | Material | Remarks | | | | | | | |

| | |
|---------------------|--------|
| | |
| designed | weight |
| checked | scale |
| approve | 1:5:1 |
| Sheet | |
| 1"MF PVC COVER | |
| IPG-8901609-8901615 | |

| | | | | | | | |
|------|---------|---------|---------|---------|---------|----------|-----------|
| CODE | 8901609 | 8901610 | 8901611 | 8901612 | 8901613 | 8901614 | 8901615 |
| L | 75/91 | 110/160 | 200/320 | 260/450 | 500/900 | 750/1400 | 1000/1900 |